

# LONDON 8 ROOM KIT

The London 8 room kit is designed for rooms up to 100 sq ft (9.3 sq m), or can be combined with other products to treat larger spaces. Ideally suited for home theaters and studios, these easy to use kits are an affordable way to introduce acoustic treatment to any room.

The London 8 contains select Broadway panels to tackle problems such as primary reflections, flutter echo, and standing waves. Broadway panels are made from high-density 6lb per cubic foot glass wool, offering nearly five times greater absorption than typical low cost foam alternatives. This means that you get more absorption with fewer panels, while assuring an even absorption curve throughout the frequency range. The London 8 is available in black, beige or grey fabric or in Absolute White™ paintable finish. 12 panels included.

In addition to acoustic panels, each London 8 room kit comes equipped with corresponding mounting hardware and instructions for easy installation.



**SPECIFICATIONS:**

<b>ORDER NUMBER</b>	Z900-0105-XX (xx denotes color code 00=Black; 03=Beige; 08=Grey; 09=White)
<b>SURFACE COVERAGE</b>	20 sq/ft (1.85 sq/m)
<b>RECYCLED CONTENT</b>	Up to 51%
<b>LEED ELIGIBLE</b>	Yes


**ABSORPTION CHARACTERISTICS:**

Sound absorption coefficient data

PANEL DEPTH	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz
1" (25mm) Depth*	0.17	0.28	0.81	1.00	1.02	0.95
1.5" (38mm) Depth**	0.31	0.56	1.01	1.00	1.01	1.00

\* Testing performed by Riverbank Acoustical Laboratories. The test method conform explicitly with the requirements of the ASTM Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method: ASTM C 423-02a and E795-05.

\*\* Typical performance based on quarter wavelength calculations.

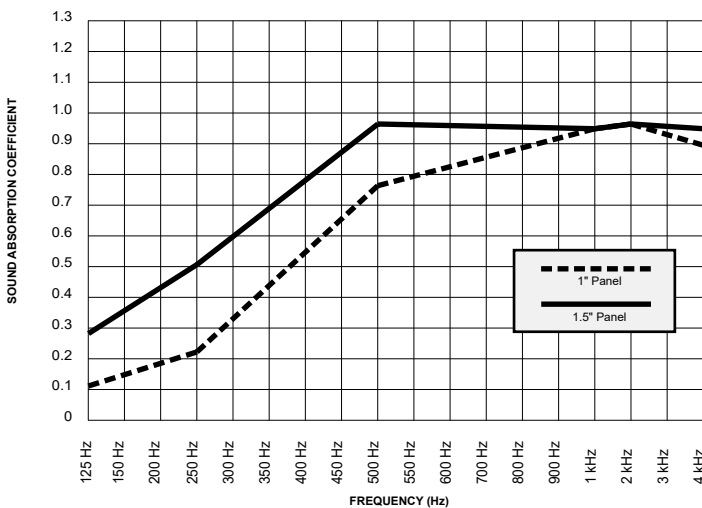

**FIRE & BURN PERFORMANCE:**

COUNTRY	TEST STANDARD	CLASSIFICATION
<b>FABRIC WRAP</b>		
Canada	CAN/ULC-S102-03	Class A/1
USA	ASTM E84-09	Class A/1
Europe	EN 13501-1	A2-s1, d0
Australia / New Zealand	AS/NZS 1530.3	(I)0, (S)0, (H)0, (Sm)5
<b>PAINTABLE</b>		
Canada	CAN/ULC-S102-10	Class A/1
USA	ASTM E84-11b	Class A/1
Europe	EN 13501-1	B-s2, d0
Australia / New Zealand	AS/NZS 1530.3	(I)0, (S)0, (H)0, (Sm)3

**KIT INCLUDES:**

	QTY	MODEL	SIZE	WEIGHT	EDGE
	4	Control Columns 36"	12 x 36 x 1.5" (305 x 910 x 38mm)	2.7 lbs (1.2 kg) per panel	Beveled
	8	Scatter Blocks	12 x 12 x 1" (305 x 305 x 25mm)	.75 lbs (.35 kg) per panel	Beveled
	16	Surface Impaler	For mounting Control Columns and Scatter Blocks. Drywall anchors and screws included.		

**APPLICATION:**

